






	SX58H7	SX58J3
Front View		
Rear View		
	SX58H7	SX58J3
Chassis LWH	Aluminum cover Aluminum chassis 32.5 x 20.8 x 18.9 cm = 12.8 litres Weight: 3.8 kg net / 5.2 kg gross	Aluminum cover Steel chassis 33 x 21,5 x 19 cm = 13.5 litres Weight: 6.8 kg net / 7.5 kg gross
CPU	Socket 1366 supports Intel Core i7	Socket 1366 supports Intel Core i7
Chipset	Intel X58 + ICH10R	Intel X58 + ICH10R
Cooling	I.C.Evo Heatpipe Passive OASIS cooling	I.C.E. Heatpipe
Memory	DDR3-1066/1333 DDR3-1600 Overclock 3+1 channel, max. 4x4GB	DDR3-1066/1333 DDR3-1600 Overclock 3+1 channel, max. 4x4GB
LAN	2x Realtek RTL8111C Dual Gigabit Teaming Mode	2x Marvell 8057 Dual Gigabit Teaming Mode
Audio	Realtek ALC888 7.1 with S/PDIF out	Realtek ALC888 7.1 with S/PDIF out
Slots	2x PCIe X16 (V2.0) Supports Nvidia SLI and ATI Crossfire	2x PCIe X16 (V2.0) Supports Nvidia SLI and ATI Crossfire
Front I/O	Mic, Headphone 2x USB 2.0, 1x eSATA Power button, Reset button Power LED, HDD LED	Mic, Headphone 1x USB 2.0 1x Combo: eSATA / USB 2.0 Power button Power LED, HDD LED 4-in 1 card reader
Rear I/O	6x USB 2.0, 2x RJ45 2x eSATA + Power Audio: 8-ch line-out, Line-in, S/PDIF out Clear CMOS button	8x USB 2.0 , 2x RJ45 1x eSATA + Power Audio: 8-ch line-out, Line-in, S/PDIF out Clear CMOS button
IDE	3 SATA, 3 eSATA, 1 IDE Raid 0,1,5,10	4 SATA, 2 eSATA Raid 0,1,5,10
Other Onboard	6x USB 2.0 (3x 2x5 pins) 2x fan (4 + 3 pins) PS/2 mouse/ keyboard Audio AUX in	1x USB 2.0 (1x5 pins) 2x fan (4 + 3 pins) Audio AUX in LPC interface (supports COM/LPT)

Mainboard of SX58J3:



Mainboard of SX58J3:

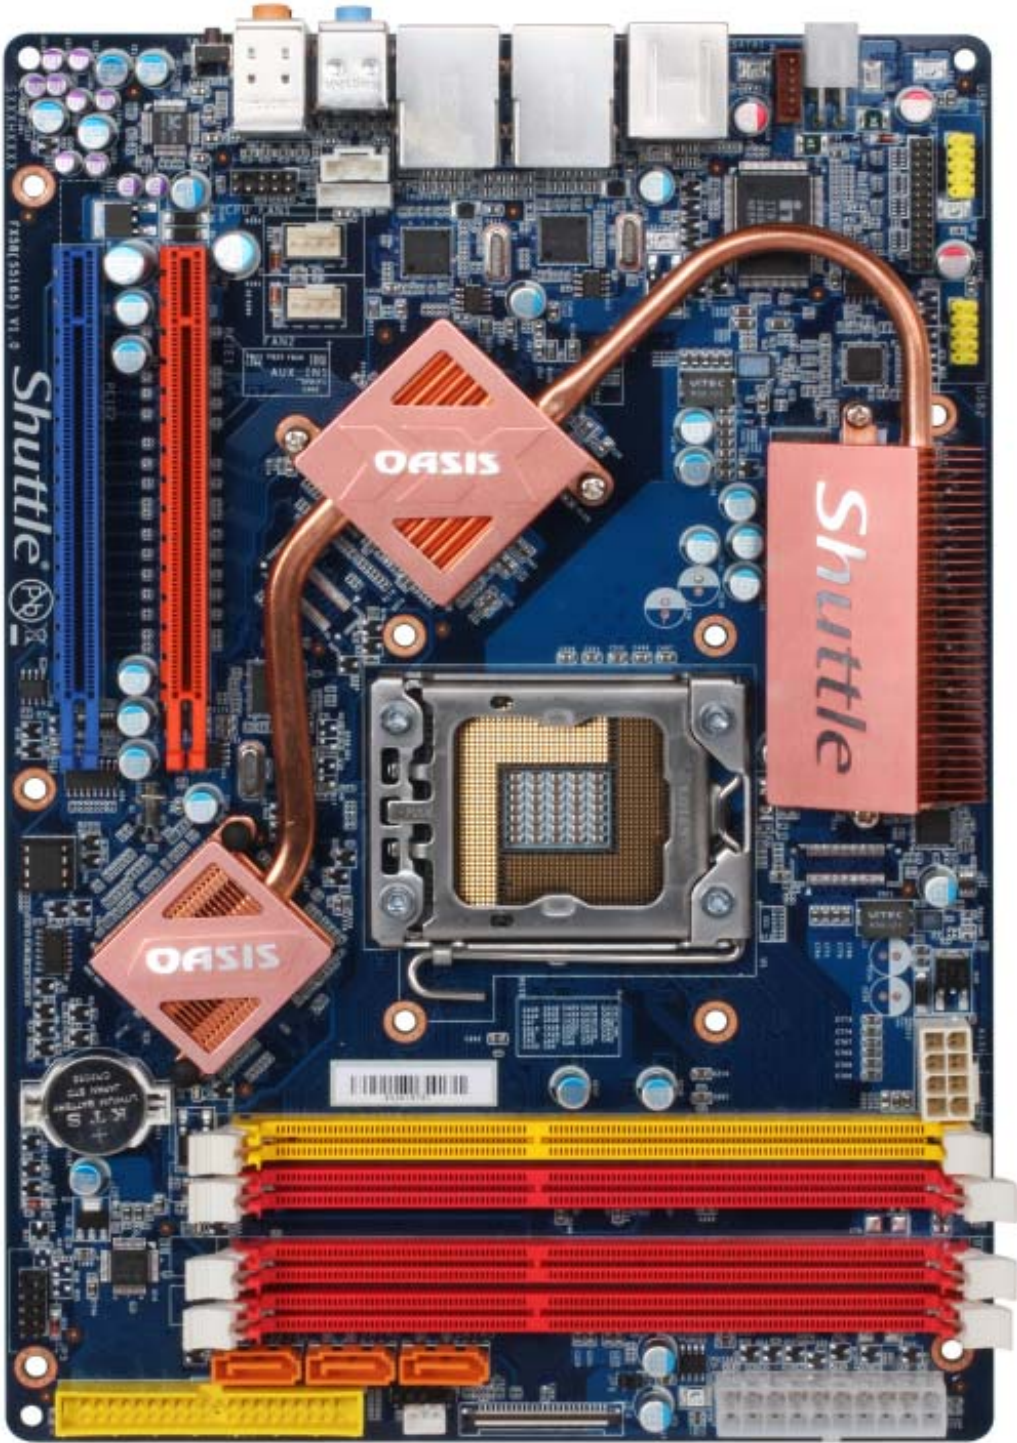